



## Applications

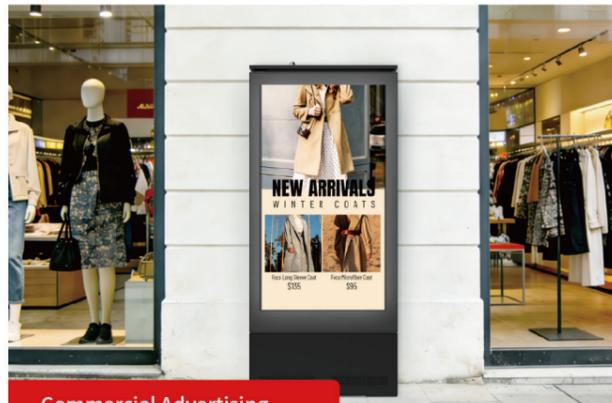

Commercial Advertising

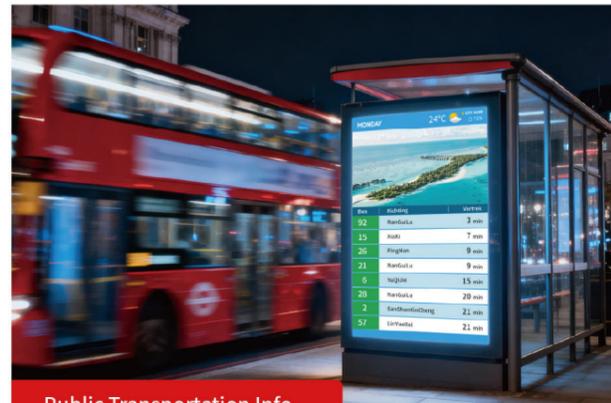

Public Transportation Info



Government Alerts



Area Guide

## Specifications

Model	PO-2.5		PO-3	
Pixel Pitch (mm)	2.5		3	
Pixel Configuration	SMD			
Module Size (mm) (W x H)	160 x 160		192 x 192	
Module Resolution (pixels) (W x H)	64 x 64		64 x 64	
Screen Size (mm) (W x H)	960 x 1760	1120 x 1920	960 x 1728	1152 x 1920
Screen Size (inch)	78"	88"	78"	88"
Screen Resolution (pixels) (W x H)	384 x 704	448 x 768	320 x 576	384 x 640
Viewing Angle (H/V)	160°/160°			
Brightness (cd/m <sup>2</sup> ) ①②	4500-5000			
Power Consumption Max. / Avg. (W/m <sup>2</sup> ) ②	650/215			
IP Rating	IP54			
Grey Level (bit)	14			
Refresh Frequency (Hz)	3840			
Maintenance	Front Access (Glass Door)			

①: Base on different hardware specification.

②: Theoretical values only. All specifications are subject to the actual product.

# POSTER

Always Visible, Always Effective

PO Series: PO-2.5 | PO-3



Brilliant Visibility



Durability and Reliability



Energy Saving



Flexible Deployment

CHAINZONE

www.chainzone.com

## Benefits




### Brilliant Visibility

- High brightness keeps content vivid even under direct sunlight.
- Anti-glare glass improves visibility and comfort in bright light.
- 2.5/3mm pixel pitch ensures crisp detail for close-up viewing.
- 160°/160° wide viewing angle captures attention from every direction.



### Durability and Reliability

- IK10 impact-resistant glass protects against accidental impacts.
- An operating temperature of -30°C~+60°C and an IP54 rating ensure all-weather performance.

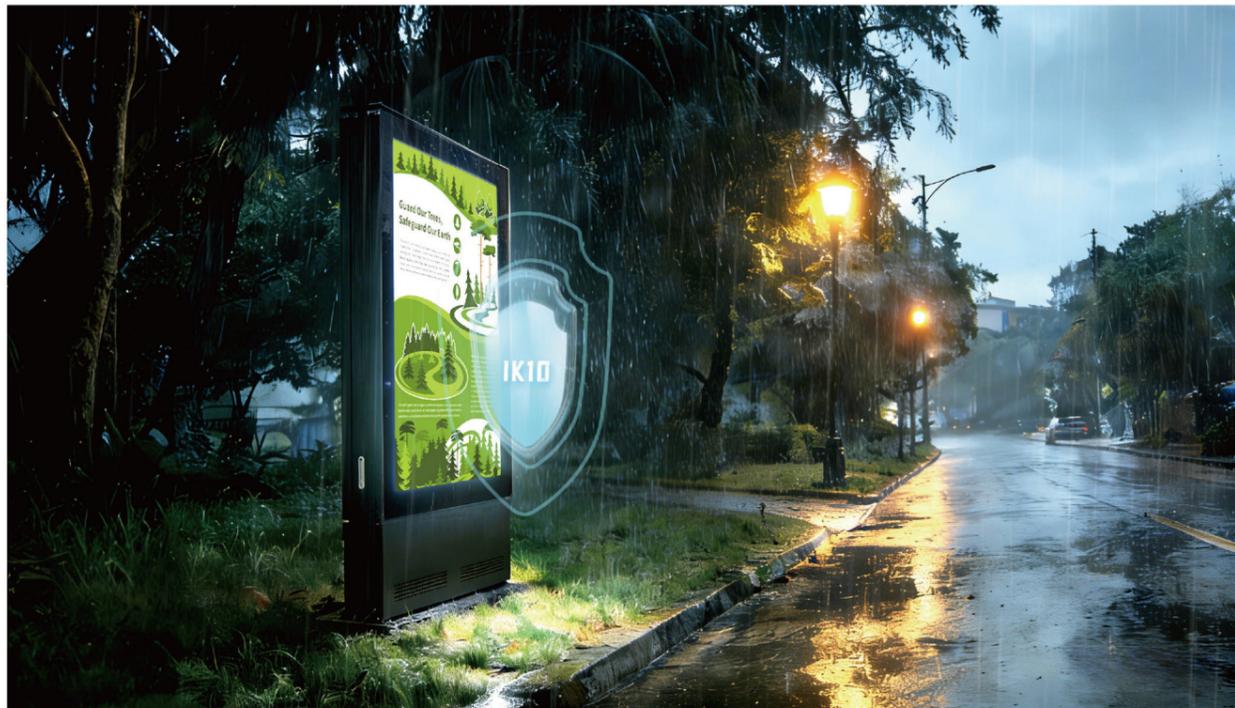


## Benefits



### Energy Saving

- Require less energy compared with LCD screen while maintaining the same image quality.

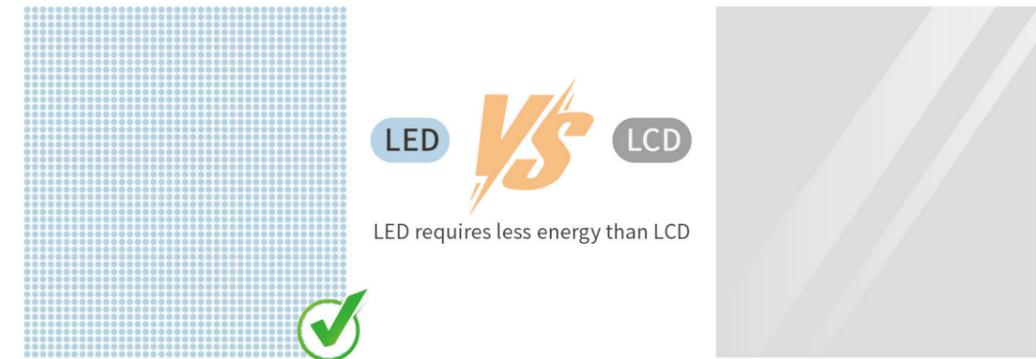

### Flexible Deployment

- Fast and easy installation.
- Support WiFi, 4G, or Cable for remote content management.
- Available mounting options: pedestal, wall, flag, or pole.

